

PE Pipe— Design and Installation

Second Edition



American Water Works
Association

PE Pipe—Design and Installations

Second Edition



**American Water Works
Association**

Manual of Water Supply Practices—M55, First Edition

PE Pipe—Design and Installation

Copyright © 2020 American Water Works Association

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopy, recording, or any information or retrieval system, except in the form of brief excerpts or quotations for review purposes, without the written permission of the publisher.

Disclaimer

The authors, contributors, editors, and publisher do not assume responsibility for the validity of the content or any consequences of its use. In no event will AWWA be liable for direct, indirect, special, incidental, or consequential damages arising out of the use of information presented in this book. In particular, AWWA will not be responsible for any costs, including, but not limited to, those incurred as a result of lost revenue. In no event shall AWWA's liability exceed the amount paid for the purchase of this book.

If you find errors in this manual, please email books@awwa.org.
Possible errata will be posted at www.awwa.org/M55.

Managing Editor/Project Manager: Melissa Valentine
Technical Editor: Melissa Valentine
Cover Design/Technical Illustrations: Mike Labruyere
Manager, Publishing Operations: Gillian Wink
Production: Innodata
Senior Specialist - Manuals: Willadee Hitchcock
Manuals Coordinator 2: Janet Greifinger

Library of Congress Cataloging-in-Publication Data


Library of Congress Control Number: 2020942018

Printed in the United States of America

ISBN 978-1-64717-020-2

eISBN 978-1-61300-560-6

DOI <https://doi.org/10.12999/AWWA.M55ed2>

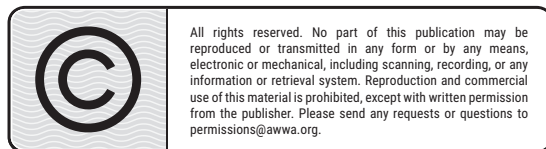

**American Water Works
Association**

American Water Works Association
6666 West Quincy Avenue
Denver, CO 80235-3098
awwa.org

Contents

List of Figures, vii	
List of Tables, xi	
Preface, xiii	
Acknowledgments, xv	
Chapter 1 Engineering Properties of Polyethylene.....1	
Polymer Characteristics, 1	
Mechanical Properties, 4	
Other Physical Properties, 7	
Chemical Properties, 9	
Environmental Considerations, 10	
Long-Term Properties, 12	
Industry Standards, 14	
Summary, 16	
References, 17	
Chapter 2 Manufacturing, Testing, and Inspection19	
Pipe Manufacture, 20	
Fittings Manufacture, 22	
Testing and Inspection, 23	
Summary, 25	
References, 26	
Chapter 3 Hydraulics of PE Pipe.....27	
Determining the Flow Diameter of a PE Pipe, 27	
Friction Head Loss, 28	
Darcy-Weisbach Friction Factor, 28	
Hazen-Williams Formula, 30	
Fittings, 31	
Air Binding, 32	
Chapter 4 Working Pressure Rating.....35	
Pressure Class, 36	
Surge Considerations, 37	
Working Pressure Rating, 40	
References, 42	
Chapter 5 External Loads43	
Flexible Pipe Design, 43	
Trench Terminology, 44	
Soil Classes, 45	
Soil Compaction, 45	
Basic and Engineered Installations, 46	

	Basic Installation, 46	
	Engineered Installation, 47	
	Pipe Deflection, 47	
	Load on Pipe, 48	
	Pipe Stiffness, 50	
	Soil Stiffness, 51	
	Composite Soil Stiffness, 52	
	Bedding Coefficient, 52	
	Time Lag, 53	
	Embankment Condition, 53	
	Deflection Limits, 54	
	Flowable Fill, 54	
	Wall Buckling, 55	
	Wall Compressive Stress, 57	
	Examples, 57	
	References, 59	
Chapter 6	Joining and Fittings	61
	Heat Fusion Joining, 61	
	Mechanical Joining, 69	
	Mainline Fittings, 74	
	Molded and Fabricated Fittings, 74	
	Branching and Tapping, 75	
	Service Connections, 76	
	References, 78	
Chapter 7	Transportation, Handling, and Storage of Pipe and Fittings	81
	Receiving Inspection, 81	
	Product Packaging, 82	
	Checking the Order, 82	
	Load Inspection, 83	
	Receiving Report and Reporting Damage, 84	
	Unloading Instructions, 84	
	Unloading Site Requirements, 84	
	Handling Equipment, 84	
	Unloading Large Fabrications, 85	
	Preinstallation Storage, 85	
	Pipe Stacking Heights, 86	
	Exposure to Ultraviolet Light and Weather, 86	
	Cold Weather Handling, 87	
	Field Handling, 88	
Chapter 8	Installation	89
	Excavation, 91	
	Locating Wires or Tapes, 96	
	Flowable Fill, 96	
	Construction Considerations, 97	
	References, 103	
Chapter 9	Hydrotesting and Commissioning	105
	Flushing, 105	
	Filling, 105	
	Leak Testing, 106	

Records, 108
 Disinfection, 108
 Commissioning, 109
 References, 109

Chapter 10 Maintenance and Repairs 111
 Disinfecting Water Mains, 111
 Cleaning, 111
 Maintenance, 112
 Repairs, 113
 New Service Connections, 113
 New Connections to Mains, 114
 References, 117

Chapter 11 Trenchless Installations 119
 Allowable Tensile Load, 120
 Horizontal Directional Drilling, 121
 Pipe Bursting / Pipe Splitting, 122
 Sliplining, 122
 Close-Fit and Compression HDPE Pipe Linings, 122
 References, 123

Appendix A Model Specifications for PE4710 125
Appendix B Earthquake Applications 127
Appendix C Marine Installations 131
Appendix D Case Studies 135
Appendix E PE4710 Pipe Data 159

Index, 163
List of AWWA Manuals, 171

Figures



- 1-1 Example and performance features of the modes of a bimodal PE pressure pipe resin, 3
- 1-2 Traditional model of HDPE, 4
- 1-3 Generalized tensile stress-strain curve for PE pipe grades, 6

- 2-1 Typical extrusion line, 20
- 2-2 Typical pipe extruder, 21
- 2-3 Typical injection molding machine, 22
- 2-4 Prefabricated 90° elbow being attached in field, 23

- 3-1 Moody diagram, 29

- 5-1 Flexible Pipe Deflection, 44
- 5-2 Trench construction and terminology, 45
- 5-3 Ovality correction factor, 56

- 6-1 Butt fusion joint, 63
- 6-2 Typical butt fusion machine (butt fusion machines are available to fuse pipe up to 65 in. in diameter) , 63
- 6-3 Conventional saddle fusion joint, 65
- 6-4 Typical electrofusion saddle fusion, 66
- 6-5 Socket fusion joining, 67
- 6-6 Typical electrofusion joint, 68
- 6-7 Typical electrofusion fitting, 68
- 6-8 Mechanical compression coupling with restraint—PE restrained by electrofusion flex restraints—PVC pipe restrained using a tapered gripping ring, 70
- 6-9 PE flange adapter, 71
- 6-10 Mechanical flange adapter with insert stiffener, 72
- 6-11 MJ adapter, 72
- 6-12 Transition fittings, 73
- 6-13 Molded and fabricated elbows, 74
- 6-14 Electrofusion branch saddle connected to gate valve by MJ adapters, 75
- 6-15 Conventional saddle fusion and electrofusion branch saddles, 75
- 6-16 Mechanical tapping saddle, 76
- 6-17 Saddle tapping tees, 77
- 6-18 Corporation stop saddles, 77
- 6-19 HDPE Service Line, 77

- 7-1 Typical silo pack truckload, 82
- 7-2 Typical bulk pack truckload, 83

- 7-3 Typical strip load truckload, 83
- 7-4 Forklift load capacity, 85
- 7-5 Loose pipe storage, 86

- 8-1 Trench box installation, 92
- 8-2 Trench Width, 93
- 8-3 Soil padding for buried pipeline, 96
- 8-4 Bend radius, 98
- 8-5 Pullout prevention technique, 99
- 8-6 Pullout prevention technique, 100
- 8-7 In-line anchor using flex restraint, 100
- 8-8 In-line anchor using integral pipe collar (wall anchor), 100
- 8-9 Controlling shear and bending, 102
- 8-10 Flange support at wall, 102
- 8-11 Appurtenance support pad, 103

- 10-1 Attachment of mechanical saddle, 114
- 10-2 Corp stop attached to mechanical saddle, 114
- 10-3 Electrofusion processor, 115
- 10-5 A 6-in. outlet saddle with MJ adapter for fusion on 8-in. PE pipe, 115
- 10-4 Electrofusion saddle with corp stop and cutter attached through corp stop to make hot tap [use new 10-19.jpg full size file on onedrive], 115
- 10-6 Electrofusion coupling connecting PE reducing tee with mechanical joint adapter to, 115
- 10-7 In-the-trench sidewall fusion to attach PE pipeline saddle to water line , 116
- 10-8 Tapping sleeve with MJ outlet, 116
- 10-9 Compression by flange coupling for use in joining PE to other materials, 116

- 11-1 Typical HDD drill rig. (Note: can be set up within one traffic lane.), 121

- D-1 San Antonio Water System, 136
- D-2 West Monroe, LA, 137
- D-3 City of Lago Vista, TX, 138
- D-4 Fort Wayne City Utilities, IN, 139
- D-5 Mammoth Cave National Park Project, 140
- D-6 City of Duluth, MN, 141
- D-7 City of Casselberry, FL, 142
- D-8 Citizens Energy Group-White River Water, 143
- D-9 East Bay Municipal Utility District, CA, 144
- D-10 City of Miami Beach, FL, 145
- D-11 East Windsor Municipal Utility District, NJ, 146
- D-12 City of Arlington, TX, 147
- D-13 City Utilities of Springfield, MO, 148
- D-14 City of Fort Lauderdale, FL, 149
- D-15 Harris County MUD, Houston, TX, 150

- D-16 City of Palo Alto, CA – Waverly, 151
- D-17 Citizens Energy Group, IN, 152
- D-18 City of Tulsa, OK, 153
- D-19 Colorado Springs Utilities, CO, 154
- D-20 City of Maple Ridge, BC, Canada, 155
- D-21 King County Wastewater Treatment Division, WA, 156
- D-22 US Army Corps of Engineers, VA, 157
- D-23 City of Palo Alto, CA – Sewer Rehabilitation, 158

Tables

- 1-1 Effects of density, molecular weight, and molecular weight distribution, 2
- 1-2 Electrical properties of PE, 9
- 1-3 Example of D3350 Cell Classification for PE4710, 15

- 3-1 Representative equivalent length in pipe diameters of various piping components, 32

- 4-1 PE4710 HDB for standard compound, 37
- 4-2 PE4710 PC* for standard powder distribution pipe at 80°F (27°C), 37
- 4-3 PE4710 Temperature compensation multipliers, F_T , 37
- 4-4 Surge pressures generated by a sudden change in water flow velocity for PE pipes operating at service temperatures through 80°F (27°C), 39
- 4-5 PE4710 working pressure rating for recurring surge events as a result of instantaneous change in water column velocity, 41

- 5-1 Soil classes for pipe installation, 46
- 5-2 HS-20 live loads (includes impact) for rigid pavement (lb/in.²), 49
- 5-3 HS-20 live loads (includes impact) for flexible pavement (lb/in.²), 49
- 5-4 Railroad live loads (lb/in.²) (includes impact), 49
- 5-5 Apparent modulus of elasticity of PE at 73° F, psi, 50
- 5-6 Modulus of soil reaction, E' , values, psi, 51
- 5-7 Values for the soil support combining factor, S_c , 52
- 5-8 E'_N based on SPT values, psi, 53
- 5-9 Allowable deflection for PE pressure pipe, 54

- 7-1 Suggested jobsite loose storage stacking heights for conventionally extruded pipe lengths, 87

- 8-1 Maximum particle size permitted in embedment, 90
- 8-2 Recommended trench width for basic installation, 93
- 8-3 Minimum cold (field) bending radius (long-term), 97
- 8-4 Approximate Poisson's pullout force for PE4710 DIPS DR17, 101

- 9-1 Standard pressure class, 107

- 11-1 PE 4710 typical safe pull stress (psi) @ 73°F , 120

- B-1 Observed ground strains due to permanent ground deformation, 128
- B-2 Japanese observations in past earthquakes, 129

- C-1 Minimum short-term bending radius, 132

- E-1 PE4710 C906 Ductile-Iron Outside Diameter (DIOD/DIPS), 160
- E-2 PE4710 C906 Iron Pipe Sizes (IPS), 161

Preface



This is the second edition of AWWA M55, *PE Pipe—Design and Installation*. The manual provides the user with both technical and general information to aid in the design, specification, procurement, installation, and understanding of the high-density polyethylene (HDPE) pipe and fittings. It is a discussion of recommended practice, not an American Water Works Association (AWWA) standard calling for compliance with certain specifications. It is intended for use by utilities and municipalities of all sizes, whether as a reference book or textbook for those not fully familiar with HDPE pipe and fittings products. Municipal and consulting engineers may use this manual in preparing plans and specifications for new HDPE pipe projects.

The manual describes HDPE pipe and fittings products and certain appurtenances, and their applications to practical installations, whether of a standard or special nature. For adequate knowledge of these products, the entire manual needs to be studied. Readers will also find the manual a useful source of information for assistance with specific or unusual conditions. The manual contains a list of applicable national standards, which may be purchased from the respective standards organizations (e.g., AWWA, ASTM, etc.). Readers should use the latest editions of the standards that are referenced.

Credit is extended to The Plastics Pipe Institute, Inc. (www.plasticpipe.org) for its contribution to the manual.