

RTCA, Inc.
1140 Connecticut Avenue, NW, Suite 1020
Washington, DC 20036-4001 USA

**Minimum Operational Performance Standards
(MOPS) For ATC Two-Way Data Link
Communications**

RTCA DO-219
August 27, 1993

Prepared by: SC-169
© 1993 RTCA, Inc.

Copies of this document may be obtained from

RTCA, Inc.

Telephone: 202-833-9339

Facsimile: 202-833-9434

Internet: www.rtca.org

Please visit the RTCA Online Store for document pricing and ordering information.

FOREWORD

This document was prepared by RTCA Special Committee 169 (SC-169). It was approved by the RTCA Technical Management Committee on August 27, 1993.

RTCA, Incorporated is a not-for-profit corporation formed to advance the art and science of aviation and aviation electronic systems for the benefit of the public. The organization functions as a Federal Advisory Committee and develops consensus based recommendations on contemporary aviation issues. RTCA's objectives include but are not limited to:

- coalescing aviation system user and provider technical requirements in a manner that helps government and industry meet their mutual objectives and responsibilities;
- analyzing and recommending solutions to the system technical issues that aviation faces as it continues to pursue increased safety, system capacity and efficiency;
- developing consensus on the application of pertinent technology to fulfill user and provider requirements, including development of minimum operational performance standards for electronic systems and equipment that support aviation, and
- assisting in developing the appropriate technical material upon which positions for the International Civil Aviation Organization and the International Telecommunication Union and other appropriate international organizations can be based.

The organization's recommendations are often used as the basis for government and private sector decisions as well as the foundation for many Federal Aviation Administration Technical Standard Orders.

Since RTCA is not an official agency of the United States Government, its recommendations may not be regarded as statements of official government policy unless so enunciated by the U. S. government organization or agency having statutory jurisdiction over any matters to which the recommendations relate.

This Page Intentionally Left Blank

TABLE OF CONTENTS

	<u>Page</u>
FOREWORD	i
1.0 PURPOSE AND SCOPE	1
1.1 Introduction	1
1.2 System Overview	3
1.3 Operational Overview	4
1.4 Connection Management Overview	4
1.4.1 Connection Establishment	4
1.4.2 Connection Maintenance	5
1.4.3 Connection Termination	5
1.4.4 Connection Transfer	5
1.5 Goals	5
1.5.1 System Operational Goals	5
1.5.2 System Design Goals	6
1.6 Assumptions	6
1.6.1 Human Factors Assumptions	6
1.6.2 Pilot/Controller Procedural Assumptions	8
1.6.3 Communication System Assumptions	9
1.6.4 Context Management Service Assumptions	9
1.6.5 ATCComm Related Assumptions	10
1.7 Test Procedures	10
1.8 Definitions of Terms	11
1.8.1 Acronyms	11
1.8.2 General Definitions	13
2.0 PERFORMANCE REQUIREMENTS AND TEST PROCEDURES	15
2.1 General	15
2.1.1 Airworthiness	15
2.1.2 General Performance	15
2.1.3 Fire Resistance	15
2.1.4 Operation of Controls	15
2.1.5 Accessibility of Controls	15
2.1.6 Effects of Tests	15
2.2 Functions and Equipment Characteristics	15
2.2.1 ATN Interface	16
2.2.1.1 Physical Layer	16
2.2.1.2 Data Link Layer	16
2.2.1.3 Network Layer	16
2.2.1.4 Transport Layer	19
2.2.1.4.1 Timers and Associated Variables	19
2.2.1.4.2 ATCComm Transport Layer Profile	19
2.2.1.4.3 ATCComm Negotiations	23
2.2.1.5 Session Layer	23
2.2.1.6 Presentation Layer	23

	<u>Page</u>	
2.2.1.7	Application Layer	23
2.2.2	Connection Management	23
2.2.2.1	Connection Initiation	23
2.2.2.1.1	Connection Initiation - No Connections	23
	2.2.2.1.2 Connection Initiation - One Connecio	24
	2.2.2.1.3 Connection Initiation - Two Connection	25
	2.2.2.2 Connection Termination	26
	2.2.2.2.1 Connection Termination - Single Element Message	26
	2.2.2.2.2 Connection Termination - Multiple Element Message	26
	2.2.2.2.3 Connection Termination - Pilot Action	27
	2.2.2.2.4 Connection Termination - ATC Data Authorit	27
	2.2.2.2.5 Connection Termination - Any Other Conditio	27
	2.2.2.3 Next ATC Data Authority Information Retention	28
2.2.3	Message Set	28
2.2.3.1	Message Attribute Tables	28
2.2.3.2	Message Presentation	30
2.2.3.3	Message Structure and Content	30
2.2.3.4	Message Encoding/Decoding	78
2.2.4	Message Header	78
2.2.4.1	Message Identification Number	78
2.2.4.2	Message Reference Number	79
2.2.5	Message Attributes	79
2.2.5.1	Urgency	79
2.2.5.2	Alert	79
2.2.5.3	Response	80
2.2.5.4	Recall	81
2.2.6	Message Handling	81
2.2.6.1	Message Elements	81
2.2.6.2	Message Data Types	82
2.2.6.3	Message Display	82
2.2.6.4	Pending Messages	82
2.2.6.5	Indicators	83
2.2.6.6	Controls	83
2.2.6.7	Data Authority Determination	84
2.2.6.8	Message Errors	84
2.3	Equipment Performance - Environmental Conditions	84
2.4	Equipment Test Procedures	84
2.4.1	Test Conditions	88
2.4.2	Test Procedures	88
2.4.2.1	ATN Interface Tests	89
	2.4.2.1.1 Internetwork Protocol Tests	89
	2.4.2.1.2 Transport Protocol Test	90
	2.4.2.1.3 Connection Negotiation Tests	90
	2.4.2.1.4 Timer Tests	93
2.4.2.2	Connection Management Tests	95
	2.4.2.2.1 Connection Initiation - No Connections Test	95

	<u>Page</u>
2.4.2.2.2	Connection Initiation - One Connection Test 96
2.4.2.2.3	Connection Initiation - Two Connections Tests . . 98
2.4.2.2.4	Connection Termination - Single Element Message Tests 98
2.4.2.2.5	Connection Termination - Multiple Element Message Tests 99
2.4.2.2.6	Connection Termination - Pilot Action Test 101
2.4.2.2.7	Connection Termination - Data Authority Test . . 101
2.4.2.2.8	Connection Termination - Any Other Condition Tests 102
2.4.2.2.9	Next ATC Data Authority Information Retention Test 102
2.4.2.3	Message Set Tests 104
2.4.2.3.1	Prerequisites 104
2.4.2.3.2	Encoding Tests 104
2.4.2.3.3	Decoding Tests 109
2.4.2.4	Message Header Tests 113
2.4.2.4.1	Message Identification Number Tests 113
2.4.2.4.2	Message Reference Number Test 115
2.4.2.5	Message Attribute Tests 117
2.4.2.5.1	Precedence Tests 117
2.4.2.5.2	Urgency Test 119
2.4.2.5.3	Alert Tests 120
2.4.2.5.4	Response Test 121
2.4.2.5.5	Recall Tests 125
2.4.2.6	Message Handling Tests 126
2.4.2.6.1	Message Element Tests 126
2.4.2.6.2	Message Display Test 127
2.4.2.6.3	Pending Messages Test 128
2.4.2.6.4	Indicators Test 130
2.4.2.6.5	Controls Test 131
2.4.2.6.6	Data Authority Determination Test 132
2.4.2.6.7	Message Errors Test 132
3.0	INSTALLED EQUIPMENT PERFORMANCE 135
3.1	Equipment Installation 135
3.1.1	Accessibility 135
3.1.2	Aircraft Environment 135
3.1.3	Display Visibility 135
3.1.4	Dynamic Response 135
3.1.5	Failure Protection 135
3.1.6	Interference Effects 136
3.1.7	Inadvertent Turnoff 136
3.2	Installed Equipment Performance Requirements 136
3.2.1	Active Status 136
3.2.2	Context Management Interface 136
3.2.3	Visual Display Indication 136

	<u>Page</u>	
3.2.4	Multi-Function Display Access	137
3.2.5	System/Function Integration	137
3.2.6	Pilot Alert Interface	137
3.2.7	Message Display	137
3.2.8	Data Entry	138
3.2.9	System Performance	138
3.3	Conditions of Test	138
3.3.1	Safety Precautions	138
3.3.2	Power Input	138
3.3.3	Associated Equipment or Systems	139
3.3.4	Environment	139
3.3.5	Adjustment of Equipment	139
3.3.6	Warm-Up Period	139
3.4	Test Procedures for Installed Equipment Performance	139
3.4.1	Ground Test Procedures	139
3.4.1.1	Conformity Inspection	139
3.4.1.2	Equipment Function Test	139
3.4.1.3	Interference Effects Test	141
3.4.1.4	Power Supply Fluctuations Test	141
3.4.1.5	Equipment Accessibility Test	141
3.4.1.6	Functions and Equipment Characteristics Tests	141
3.4.1.7	Active Status Test	141
3.4.1.8	Context Management Interface Test	141
3.4.1.9	Visual Display Indication Test	141
3.4.1.10	Multi-Function Display Access Test	141
3.4.1.11	System/Function Integration Tests	142
3.4.1.11.1	Received Message Test	142
3.4.1.11.2	Recalled Message Test	142
3.4.1.12	Pilot Alert System Tests	142
3.4.1.13	Message Display Test	142
3.4.1.14	Data Entry Test	143
3.4.1.15	Time Performance Test	143
3.4.2	Flight Test Procedures	143
3.4.2.1	Displayed Data Readability	144
3.4.2.2	Interference Effects	144
3.4.2.3	System Interoperability Demonstration	144
3.4.2.4	Simulator Demonstration	144
3.4.2.5	Flight Demonstration	144
4.0	OPERATIONAL CHARACTERISTICS	145
4.1	Required Operational Characteristics	145
4.1.1	Power Input	145
4.1.2	Message Displays	145
4.1.3	Message Notification	145
4.1.4	System Operational Degradation	145
4.1.5	Equipment Operation Limitations	145
4.2	Test Procedures for Operational Characteristics	145

	<u>Page</u>
4.2.1 Power Input	145
4.2.2 Message Displays	145
4.2.3 Message Preparation Controls	145
4.2.4 System Operational Readiness	146

This Page Intentionally Left Blank

1.0 PURPOSE AND SCOPE

1.1 Introduction

This document contains Minimum Operational Performance Standards (MOPS) for aircraft equipment required for Air Traffic Control (ATC) Two-Way Data Link Communication (TWDL) services. TWDL Services are one element of Air Traffic Services Communication (ATSC). Figure 1-1 depicts the general hierarchy for the communication services which make up the ATSC.

ATSC addressing requirements are supported by the Context Management (CM) Service. The Aeronautical Telecommunication Network (ATN) provides the media and protocols to conduct data link Air Traffic Services communication.

Note: This document only presents requirements for TWDL Services.

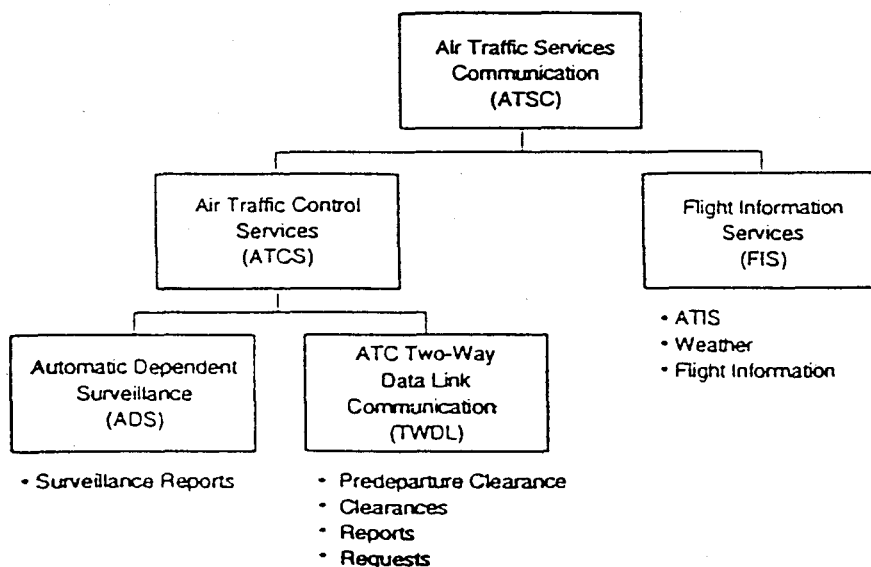


FIGURE 1-1: ATSC GENERAL HIERARCHY